

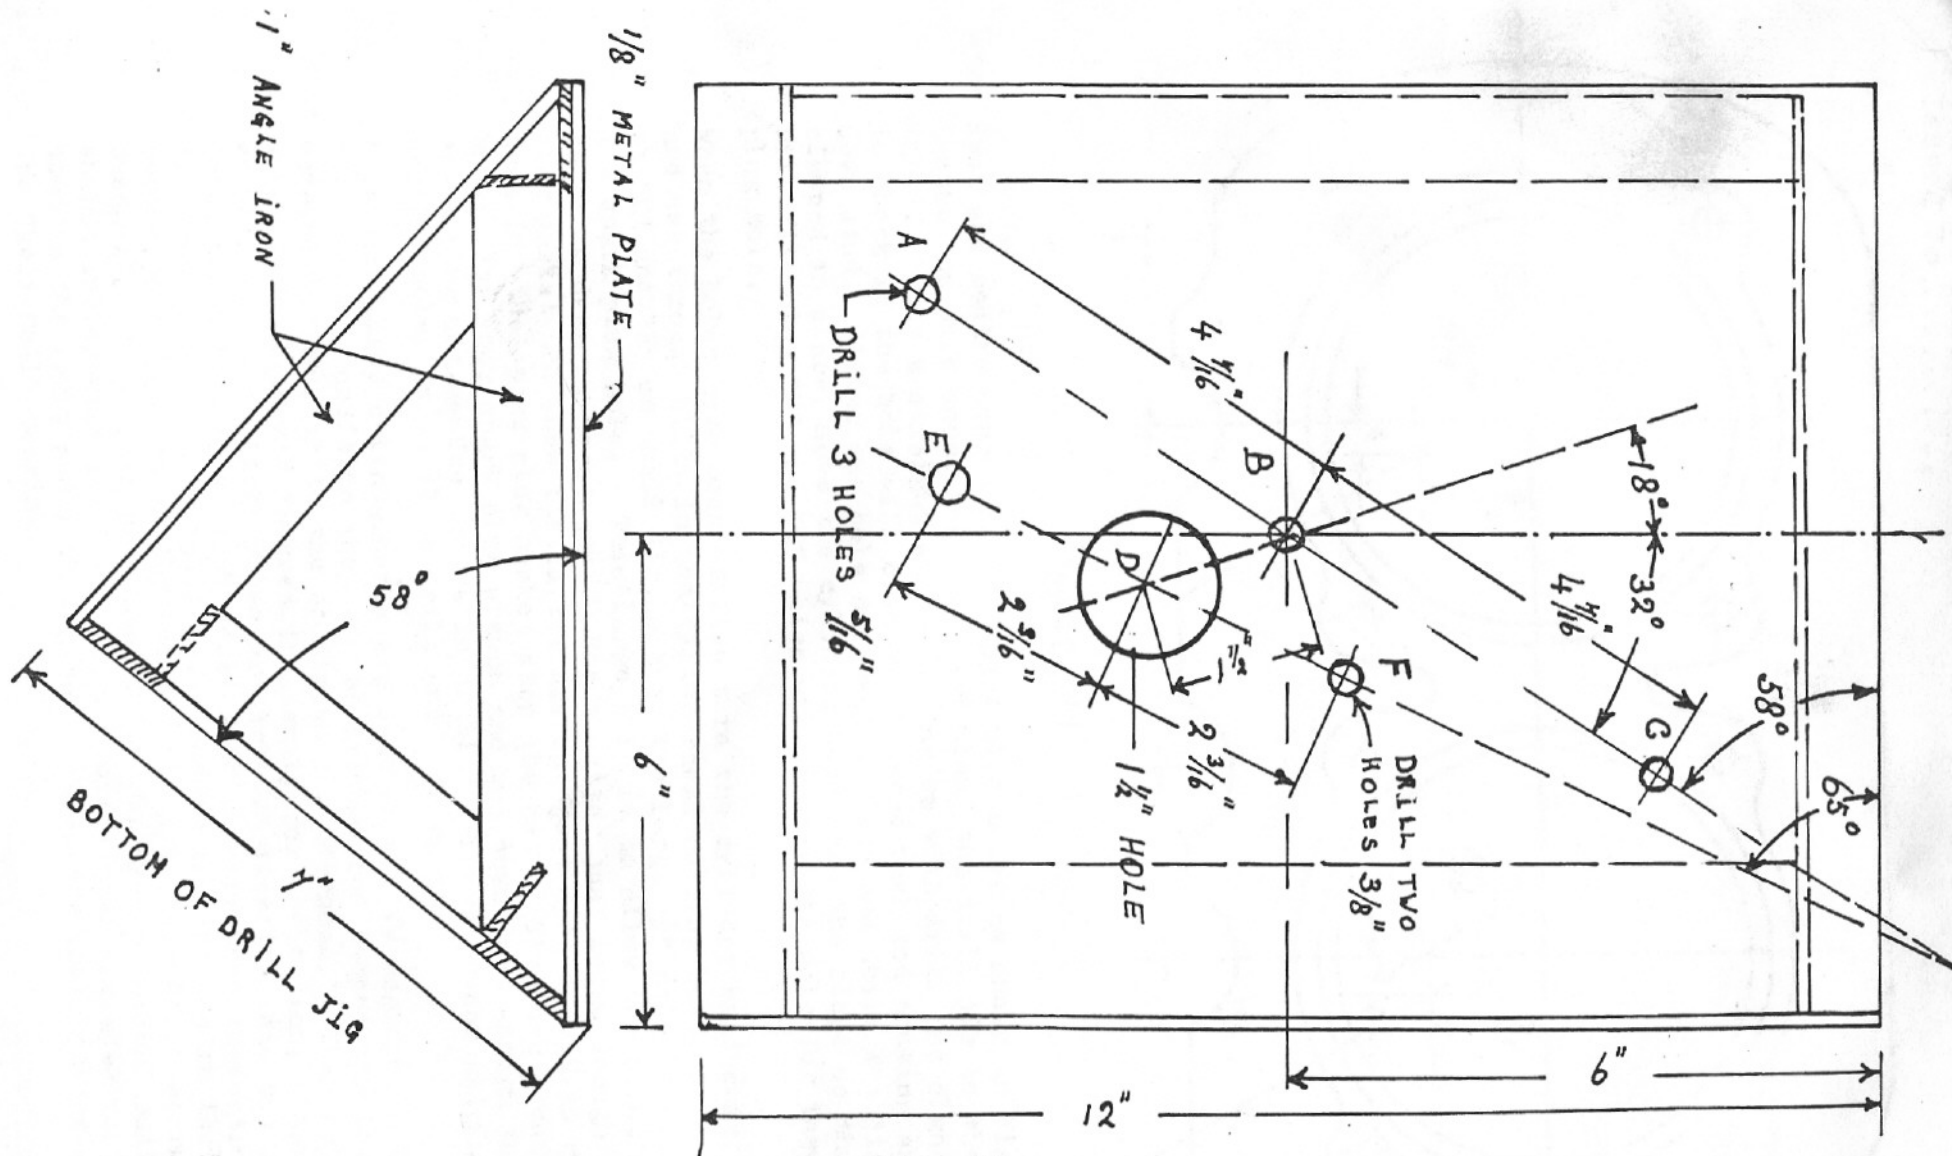


Fig. 10

DRILL JIG FOR INSTALLING EXTRA SPARK PLUG IN VW CYLINDER HEAD. Locate the cylinder head on the drill jig (see Fig.12) with the rocker arm studs in hole A and B of Fig.10 and tighten down.